


CONTROL PANEL DESCRIPTION

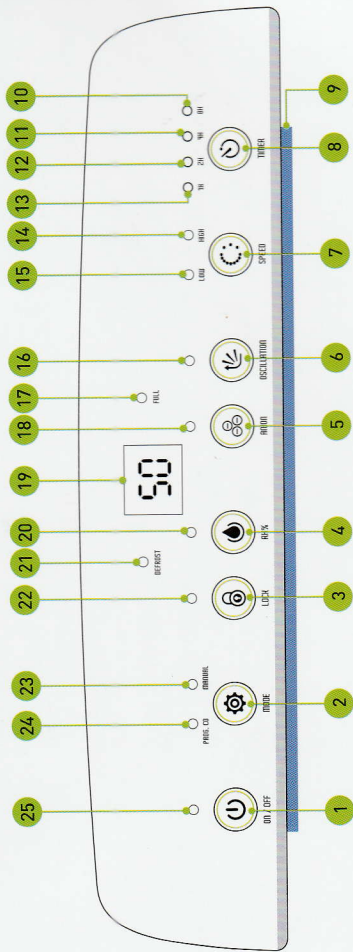

- 1 Power Control
- 2 Mode (Prog. CO or Manual)
- 3 Childlock
- 4 RH% Setting
- 5 Anion Mode
- 6 Oscillation
- 7 Speed
- 8 Prog. Timer
- 9 System Operation Indicator
- 10 8-Hour Timer Indicator
- 11 4-Hour Timer Indicator
- 12 2-Hour Timer Indicator
- 13 1-Hour Timer Indicator
- 14 High Fan Speed Indicator
- 15 Low Fan Speed Indicator
- 16 Oscillating On Indicator
- 17 Full Tank Indicator
- 18 Anion Mode On Indicator
- 19 RH% Display
- 20 Manual RH% Setting Indicator
- 21 Defrost Indicator
- 22 Childlock On Indicator
- 23 Manual Mode On Indicator
- 24 Prog. CO On Indicator
- 25 Power ON Indicator

(Blue: In Operation, Orange: Under Auto-Shut Off Mode)

TECHNICAL SPECIFICATIONS

Voltage / Frequency 220 - 240 V / 50 Hz

Power Consumption (30°C, 80% RH) 304 Watts

Extraction (30°C, 80% RH) 20 Litres / Day

Humidity Setting Available

Auto Humidity Sensor Available

Running Temperature 5°C to 35°C

Compressor Rotary

Coolant R-134A

Empty Weight 13.2 Kg

Dimension (W x D x H) 346 mm x 242 mm x 590 mm

Continuous Drainage Available

Recommended Coverage • Dehumidifying Up to 484 ft² or 45 m²

Tank Capacity 4.0 Litres

Air Flow • Low Fan 160 m³/hr

• High Fan 190 m³/hr

• Prog. CO Fan: 225 m³/hr

Negative Ion Density* Up to 20 Million/cm³

Product Accessory

• HumiControl™ Accessory Pack^o Includes

4 x Enhanced Dual Mesh Activated Carbon Filter

(Suggested Replacement: 3 Months)

o It is recommended to confine to the stated recommended coverage area for effective and optimum dehumidification performance.

+ Negative ion density measurement is based from source emission.

o It is an optional product accessory.

* Based on average 8 hours a day, 7 days a week usage under normal domestic indoor environment.